

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 June 2002 (06.06.2002)


PCT

(10) International Publication Number
WO 02/43619 A2

- (51) International Patent Classification⁷: **A61F 2/06**
- (21) International Application Number: **PCT/US01/44301**
- (22) International Filing Date:
27 November 2001 (27.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/724,503 28 November 2000 (28.11.2000) US
- (71) Applicant: **SCIMED LIFE SYSTEMS, INC.** [US/US];
One SciMed Place, Maple Grove, MN 55311-1566 (US).
- (72) Inventor: **WEBER, Jan**; Bermingham Road, Tuam (IE).
- (74) Agents: **STERN, Gidon, D.** et al.; Pennie & Edmonds LLP, 1155 Avenue of the Americas, New York, NY 10036 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR MANUFACTURING A MEDICAL DEVICE HAVING A COATED PORTION BY LASER ABLATION

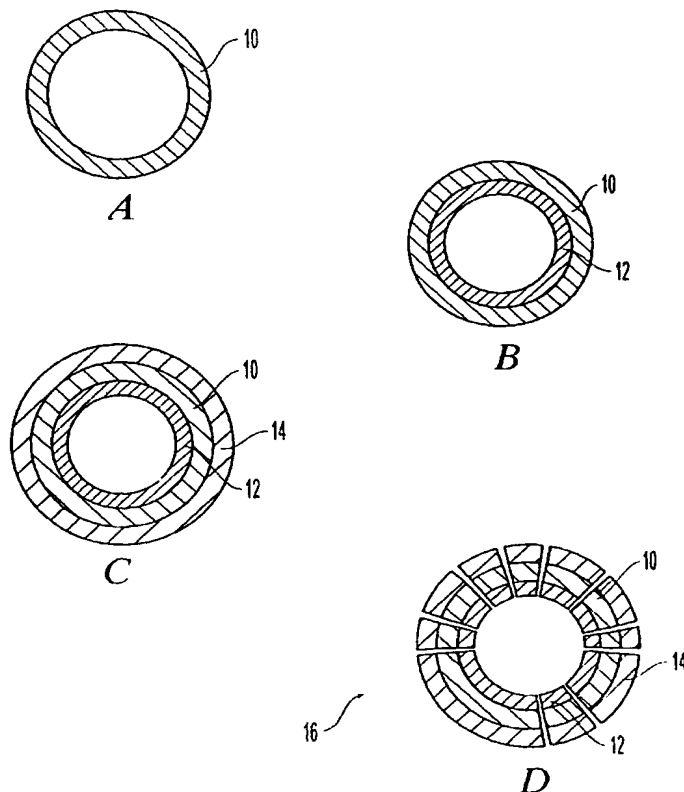

(57) Abstract: The present invention is directed to a method for manufacturing a medical device having a coated portion which comprises obtaining a structure having an inner surface and an outer surface; coating at least a portion of the inner or outer surface with a first coating material; and ablating the coated tubular structure with a laser to form at least one opening therein to form the coated portion. A plate can be used instead of the structure, and the plate is folded to form the structure after the ablation. A plurality of medical devices, made of any materials and having uniform coating(s), can be easily manufactured by the method of the present invention.

WO 02/43619 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**METHOD FOR MANUFACTURING A MEDICAL DEVICE
HAVING A COATED PORTION BY LASER ABLATION**

FIELD OF THE INVENTION

5 This invention relates generally to a method for manufacturing a medical device. More particularly, the invention is directed to a method for manufacturing a medical device having a coated portion by laser ablation.

BACKGROUND OF THE INVENTION

10 Implantable medical devices, such as prosthesis or stents, are used to reduce restenosis after balloon angioplasty or other procedures involving catheters. Usually, the suitable medical device or stent is cylindrical in shape. The walls of the cylindrical structure can be formed of metal or polymer with openings therein, *e.g.*, a mesh. The stent is implanted into a body lumen, such as a blood vessel, where it stays permanently, to keep
15 the vessel open and to improve blood flow to the heart muscle and relieve symptoms. Stents can also be positioned in other parts of the body, such as the kidneys or the brain. The stent procedure is fairly common, and various types of stents have been developed and actually used. However, since the bare metal surface of the stents may trigger restenosis, the stent surface should be altered to make it more biocompatible. Stents coated with polymers have
20 been offered to reduce likelihood of restenosis caused by the metal surface of stents. Further, there are various types of polymer coats for stents which contain drugs which are delivered to an afflicted area of a body lumen. Drugs may be either bonded chemically, physically or absorbed in the polymer matrix. Also, for the purpose of obtaining drug delivery stents, the drugs may be directly coated or immobilized onto the stents, *e.g.* using a
25 binding molecule between the drug molecule and the stent surface.

 Previously, such coated stents have been manufactured by shaping the body of the stents first by photo-etching, laser ablation, electron beam ablation, or any other means, and then coating the stents with polymer compositions or drug compositions by dip-coating, spray-coating or any other means. However, due to the complex geometry of the
30 stent, applying an even coating on a metal stent is very difficult. Therefore, methods for easily manufacturing a stent with uniform coating(s) are necessary.

 In addition, the polymer coating, when applied by methods in the art, tends to create bridges at small gaps or corners between stent struts. Also, in the conventional methods, wherein a coating process takes place after a shaping process, it is almost
35 impossible to selectively coat the stent. For example, it is impossible to coat one side of a stent without coating the other side or to apply different coatings to the outside and inside of

a stent. Therefore, there is a need for methods of making a stent, especially coated stent, wherein the coating(s) does not form bridges at gaps or corners, and wherein selective coating of the stent can be readily achieved.

SUMMARY OF THE INVENTION

5 These and other objectives are accomplished by the present invention. To achieve the aforementioned objectives, a method has been invented for manufacturing a medical device having a coated portion by laser ablation.

 An embodiment of the present invention is a method for manufacturing a medical device having a coated portion which comprises obtaining a structure having an inner
10 surface and an outer surface. At least a portion of the inner or outer surface is coated with a first coating material. Then, the coated structure is ablated with a laser to form at least one opening therein to form the coated portion.

 In another embodiment of the present invention, the method for manufacturing a medical device having a coated portion comprises obtaining a plate having a first surface and
15 a second surface. At least a portion of the first surface or second surface is coated with a first coating material. The coated plate is then ablated with a laser to form at least one opening in the coated plate. Afterward, the coated and ablated plate is formed by folding or shaping into the medical device.

DESCRIPTION OF THE FIGURES

20 Fig. 1A through 1D show the steps of an embodiment of the present invention.

 Fig. 1A depicts a cross-sectional view of a tubular structure.

 Fig. 1B depicts a cross-sectional view of the tubular structure after a coating
25 is applied on its inner surface.

 Fig. 1C depicts a cross-sectional view of the tubular structure after another coating is applied on its outer surface.

 Fig. 1D depicts a cross-sectional view of a coated tube-like portion of a medical device formed by ablating the tubular structure with a laser.

30 Fig. 2A through 2E show steps of another embodiment of the present invention.

 Fig. 2A depicts a cross-sectional view of a plate.

 Fig. 2B depicts a cross-sectional view of the plate after a coating is applied on its first surface.

35 Fig. 2C depicts a cross-sectional view of the plate after another coating is applied on its second surface.

Fig. 2D depicts a cross-sectional view of the coated plate after laser ablation.

Fig. 2E depicts a cross-sectional view of a coated tube-like portion of a medical device made by forming the ablated plate into a desired shape.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 In a method of the present invention, a structure or a plate is coated first, and then, ablated by a laser to form openings. Such ablation may be conducted with a ultrashort-pulse laser. "Ultrashort-pulse lasers" refer to lasers (light amplification by stimulated emission of radiation) consisting of pulses with durations shorter than about 10 pico ($=10^{-11}$) second. The ultrashort-pulse laser is clearly distinguished from conventional
10 continuous wave and long-pulse lasers (nanosecond (10^{-9} sec) laser) which have significantly longer pulses.

When a material is ablated by a conventional laser, the material is removed by thermal ablation wherein the material is locally heated to near melting point or boiling point. Thus, ablation using conventional lasers has various problems. For example, the
15 ablation is furthermore accompanied by a heat transfer and a strong thermal shock to surrounding material which might cause serious damage, such as cracking. Also, the material once removed tends to redeposit or re-solidify on the surrounding surface. Thus, a material ablated by a conventional laser must be cleaned to remove the redeposited material surrounding the cut surface. Hence, if a material having an immobilized molecule on its
20 surface is ablated by a conventional laser, because a clearing step is required, the immobilized molecule may be washed away at the cleaning step. Also, since process parameters for a conventional laser ablation, such as boiling point and absorption of the laser light, varies according to materials to be ablated, a layered material consisting of layers made of different materials cannot be ablated by a conventional laser.

25 On the other hand, ablation using an ultrashort-pulse laser is free from such problems. The ultrashort-pulse deposits its energy so quickly that it does not interact at all with the plume of vaporized material, which would distort and bend the incoming beam and produce a rough-edged cut. The plasma plume leaves the surface very rapidly, ensuring that it is well beyond the cut edges before the arrival of the next laser pulse. Since the pulse is
30 very short, atoms in a material to be ablated are stationary in space with respect to the pulse duration. As a result, the ultrashort-pulse laser does not react differently between dielectric materials and electric materials. Thus, any material, including glasses, polymers, ceramics, silicon, and metals, can be ablated with very high precision without damage in surrounding area by ultrashort-pulse lasers due to the absence of heat shock waves. In addition, the
35 surface ablated with a ultrashort-pulse laser has an excellent quality which does not need

further polishing as required for a surface ablated with a conventional laser because redeposition is less or absent.

The lasers suitable for use in the method of the present invention are preferably ultrashort-pulse lasers consisting of pulses shorter than about 10^{-11} second, preferably shorter than about 10^{-12} second, and most preferably shorter than about 10^{-13} second which are referred to as femtosecond lasers. The ultrashort-pulse laser used for the

The intensity (fluence) of the laser radiation that is required to ablate a material is dependent on the material to be ablated. Specifically each material has its own laser-induced optical breakdown (LIOB) threshold which characterizes the fluence required to ablate the material at a particular pulse width. Also the fluence of the ultrashort-pulse laser suitable for the present invention can be chosen according to the thickness of the tube wall, the thickness of the coating and each material. Furthermore, the number of pulses needed to ablate completely through a material can be calculated for a given energy or fluence.

For example, a hole without any redeposition can be drilled into a 0.7 mm-thick stainless steel plate coated with a 0.3 mm-thick poly(ethylene terephthalate) coating on its one surface, using a laser with a pulse duration of 220 femtosecond and a fluence of 0.6 J/cm^2 at a wavelength of 780 nm with a repetition rate of 1 kHz commercial femtosecond Ti:sapphire laser and amplifier system (SPECTRA-PHYSICS, SPITFIRE). As another example, a hole without any redeposition can be drilled into a 0.7 mm-thick piece of tantalum with a 0.3 mm-thick poly(ethylene oxide)/poly(butylene terephthalate) copolymer coating using a laser with a pulse duration of 120 femtosecond and a fluence of 0.5 J/cm^2 with the same system used above.

The laser ablation of the present invention can be conducted using any additional techniques for improved accuracy and efficiency of such ultrashort-pulse laser ablation, e.g. diffractive optical elements (DOEs) and/or polarization trepanning. See C. Momma et al., *Beam delivery of femtosecond laser radiation by diffractive optical elements*, Appl. Phys. A 67, 517-520 (1998); S. Nolte et al., *Polarization effects in ultrashort-pulse laser drilling*, Appl. Phys. A 68, 563-567 (1999), both are incorporated herein by reference.

The ultrashort-pulse lasers are known to artisans. For example, they are thoroughly disclosed by M.D. Perry et al. in *Ultrashort-Pulse Laser Machining*, Section K-ICALEO 1998, pp.1-20, which is incorporated herein by reference.

An embodiment of the present invention is illustrated in Figures 1A-1D in which a tubular structure made of a suitable medical device material is coated with a coating material or composition. Fig. 1A depicts a cross-sectional view of a tubular structure 10 made of a suitable medical device material. The inner surface of the tubular structure 10 is coated with first coating material or composition 12 (Fig. 1B). Then, the outer surface of

the tubular structure 10 is also coated with second coating material or composition 14 (Fig. 1C) which can be the same as the first coating material or composition. The tubular structure 10 having an inner coating 12 and outer coating 14 is ablated by an ultrashort-pulse laser to form openings that made up a geometric pattern in the tubular structure (Fig. 1D). In this manner, a coated tube-like portion of a medical device 16 is formed.

5 Alternatively, only one of the surfaces, *e.g.* inner or outer, may be coated.

Another embodiment is illustrated in Figures 2A-2E. Fig. 2A depicts a cross-sectional view of a plate 20 made of a suitable medical device material. A first surface of the plate 20 is coated with first coating material or composition 22 (Fig. 2B). Then, the second surface of the plate 20 is also coated with second coating material or composition 24, which can be the same as the first coating material or composition (Fig. 2C). The plate 20 having first coating 22 and second coating 24 is ablated by an ultrashort-pulse laser to form openings that make up a geometric pattern (Fig. 2D). The plate is then folded into a desired shape to form a coated tube-like portion of a medical device 26.

The term "structure" used in relation to a medical device means any structure which is at least a part of a medical device, such as a tubular structure. Likewise, the term "coated portion" used in relation to a medical device means any portion of a medical device which has (a) coating(s) on its surface(s). An example of such coated portion is a coated tube-like portion. Medical devices that can be fabricated by the method of the present invention includes those that include a tube-like or cylindrical-like portion. The tube-like portion of the medical device need not to be completely cylindrical. For instance, the cross-section of the tube-like portion can be any shape, such as rectangle, a triangle, *etc.*, not just a circle. Such devices include, without limitation, stents and grafts. A bifurcated stent is also included among the medical devices which can be fabricated by the method of the present invention.

25 Preferably, the medical device is a stent. Stents suitable for the present invention include vascular stents such as self-expanding stents and balloon expandable stents. Examples of self-expanding stents are illustrated in U.S. Patent Nos. 4,655,771 and 4,954,126 issued to Wallsten and 5,061,275 issued to Wallsten *et al.* Examples of appropriate balloon-expandable stents are shown in U.S. Patent No. 4,733,665 issued to Palmaz, U.S. Patent No. 4,800,882 issued to Gianturco and U.S. Patent No. 4,886,062 issued to Wiktor.

Appropriate materials for making the medical device are not limited for the present invention, and any material including ceramics, polymers and metals can be used for manufacturing the device by the method of the present invention. Preferably, the device is made of a biocompatible material. Examples for such polymers include poly(ethylene terephthalate), polyacetal, poly(lactic acid), poly(ethylene oxide)/poly(butylene

terephthalate) copolymer, and polycarbonate. Examples for such metals include titanium, stainless steel, platinum, tantalum or gold/platinum alloy.

In the present invention, the term "coating" encompasses all ways of coating, such as using plasma, dipping, spraying, etching, covering, plating, co-extruding and all modern chemical ways of attaching bio-molecules to surfaces as well as conventional coating. The surface is coated with a material by a method known to the artisans, such as dipping into a polymer, spraying a coating composition onto the surface, or attaching bio-molecules to surfaces. The surface of the structure or plate is optionally subjected to a pre-treatment, such as roughing, oxidizing or adding a primer, and then coated. Adding a primer is preferable as such pre-treatment. In another embodiment, the structure or plate can be covered with a film. Further, in another embodiment, the structure or plate can be made by co-extrusion of the medical device material and the coating material. More than one coating method can be used to make a medical device. Thickness of coatings can range from almost a single layer of molecules to about 0.1 mm. Suitable thickness as of the coating are known in the art and can be selected by artisans.

Medical devices coating materials suitable for the present invention include any coating material for the stent which are known to the skilled artisan. Suitable coating materials include, without limitation, metals, such as tantalum, stainless steel, nitinol, titanium, and alloys, polymeric materials, such as poly-L-lactic acid, polycarbonate, polyethylene terephthalate, silicones, polyurethanes, thermoplastic elastomers, ethylene vinyl acetate copolymers, polyolefin elastomers, hydrogels and EPDM rubbers. Such coatings include biologically active molecules, such as heparine or insuline molecules, directly attached to oxide molecules on the surface of the structure as explained below.

Also, the coating can be a drug-releasing coating which immediately or gradually releases a biologically active material. Coating polymer useful for drug coating includes hydrogel polymers which are often used to contain the biologically active material and are disclosed in U.S. Patent No. 5,304,121, U.S. Patent No. 5,464,650, PCT publication WO95/03083 and U.S. Patent No. 5,120,322, which are incorporated by reference. However, a non-hydrogel can be also used. Although polymeric molecules can be combined with biologically active molecules, biologically active materials can be directly immobilized on the surface. As disclosed in U.S. Patent No. 5,356,433 to Rowland et al., polysaccharides can be immobilized to metallic surfaces by applying an organosilane coating with amine functionality and then applying a polysaccharide using carbodiimide as a coupling gent. U.S. Patent No. 5,336,518 to Narayanan et al. also discloses that a polysaccharide can be immobilized on a surface by applying a coat of heptafluorobutylmethacrylate (HFBMA) by radiofrequency (RF) plasma deposition, creating functional groups on the surface by RF plasma with water vapor, and then applying

the polysaccharide using carbodiimide. Moreover, examples of medical devices, in particular, stents coated with polymer / biologically active material coatings are described in U.S. Patent No. 5,879,697 which is incorporated herein by reference.

The term "biologically active material" encompasses therapeutic agents, such as drugs, and also genetic materials and biological materials. The genetic materials mean DNA or RNA, including, without limitation, of DNA/RNA encoding a useful protein stated below, intended to be inserted into a human body including viral vectors and non-viral vectors. Viral vectors include adenoviruses, gutted adenoviruses, adeno-associated virus, retroviruses, alpha virus (Semliki Forest, Sindbis, etc.), lentiviruses, herpes simplex virus, ex vivo modified cells (e.g., stem cells, fibroblasts, myoblasts, satellite cells, pericytes, cardiomyocytes, skeletal myocytes, macrophage), replication competent viruses (e.g., ONYX-015), and hybrid vectors. Non-viral vectors include artificial chromosomes and mini-chromosomes, plasmid DNA vectors (e.g., pCOR), cationic polymers (e.g., polyethyleneimine, polyethyleneimine (PEI) graft copolymers (e.g., polyether-PEI and polyethylene oxide-PEI), neutral polymers PVP, SP1017 (SUPRATEK), lipids or lipoplexes, nanoparticles and microparticles with and without targeting sequences such as the protein transduction domain (PTD). The biological materials include cells, yeasts, bacteria, proteins, peptides, cytokines and hormones. Examples for peptides and proteins include growth factors (FGF, FGF-1, FGF-2, VEGF, Endothelial Mitogenic Growth Factors, and epidermal growth factors, transforming growth factor α and β , platelet derived endothelial growth factor, platelet derived growth factor, tumor necrosis factor α , hepatocyte growth factor and insulin like growth factor), transcription factors, protein kinases, CD inhibitors, thymidine kinase, and bone morphogenic proteins (BMP's), such as BMP-2, BMP-3, BMP-4, BMP-5, BMP-6 (Vgr-1), BMP-7 (OP-1), BMP-8, BMP-9, BMP-10, BMP-11, BMP-12, BMP-13, BMP-14, BMP-15, and BMP-16. Currently preferred BMP's are BMP-2, BMP-3, BMP-4, BMP-5, BMP-6, BMP-7. These dimeric proteins can be provided as homodimers, heterodimers, or combinations thereof, alone or together with other molecules. Cells can be of human origin (autologous or allogeneic) or from an animal source (xenogeneic), genetically engineered, if desired, to deliver proteins of interest at the transplant site. The delivery media can be formulated as needed to maintain cell function and viability. Cells include whole bone marrow, bone marrow derived mono-nuclear cells, progenitor cells (e.g., endothelial progenitor cells) stem cells (e.g., mesenchymal, hematopoietic, neuronal), pluripotent stem cells, fibroblasts, macrophage, and satellite cells.

Biologically active material also includes non-genetic therapeutic agents, such as:

- anti-thrombogenic agents such as heparin, heparin derivatives, urokinase, and PPACK (dextrophenylalanine proline arginine chloromethylketone);
- anti-proliferative agents such as enoxaprin, angiopeptin, or monoclonal antibodies capable of blocking smooth muscle cell proliferation, hirudin, and acetylsalicylic acid, amlodipine and doxazosin;
- 5 • anti-inflammatory agents such as glucocorticoids, betamethasone, dexamethasone, prednisolone, corticosterone, budesonide, estrogen, sulfasalazine, and mesalamine;
- antineoplastic/antiproliferative/anti-miotic agents such as paclitaxel, 5-fluorouracil, cisplatin, vinblastine, vincristine, epothilones, methotrexate, azathioprine, adriamycin and mutamycin; endostatin, angiostatin and thymidine kinase inhibitors, taxol and its analogs or derivatives;
- 10 • anesthetic agents such as lidocaine, bupivacaine, and ropivacaine;
- anti-coagulants such as D-Phe-Pro-Arg chloromethyl keton, an RGD peptide-containing compound, heparin, antithrombin compounds, platelet receptor antagonists, anti-thrombin anticodies, anti-platelet receptor antibodies, aspirin (aspirin is also classified as an analgesic, antipyretic and anti-inflammatory drug),
- 15 dipyridamole, protamine, hirudin, prostaglandin inhibitors, platelet inhibitors and tick antiplatelet peptides;
- vascular cell growth promoters such as growth factors, Vascular Endothelial Growth Factors (VEGF, all types including VEGF-2), growth factor receptors, transcriptional activators, and translational promoters;
- 20 • vascular cell growth inhibitors such as antiproliferative agents, growth factor inhibitors, growth factor receptor antagonists, transcriptional repressors, translational repressors, replication inhibitors, inhibitory antibodies, antibodies directed against growth factors, bifunctional molecules consisting of a growth factor and a cytotoxin, bifunctional molecules consisting of an antibody and a cytotoxin;
- 25 • cholesterol-lowering agents; vasodilating agents; and agents which interfere with endogenous vasoactive mechanisms;
- anti-oxidants, such as probucol;
- antibiotic agents, such as penicillin, cefoxitin, oxacillin, tobramycin
- 30 • angiogenic substances, such as acidic and basic fibroblast growth factors, estrogen including estradiol (E2), estriol (E3) and 17-Beta Estradiol; and
- drugs for heart failure, such as digoxin, beta-blockers, angiotensin-converting enzyme (ACE) inhibitors including captopril and enalapril.

35 In the devices made by the method of the invention, both surfaces of the tube-like portion can be coated with a same material at the same time.

Also, one surface of the structure or plate need not be coated, while the other surface has a coating. A medical device having such portion is preferable for a drug-delivery medical device for delivering a biologically active material to a blood vessel surface while minimizing the amount of biologically active material which is delivered into the blood stream. Such a medical device is also preferable when the coating is easily
5 damaged during implantation of the medical device, *e.g.*, because of the unfolding shear-action of the delivery balloon.

Further in another embodiment, inner and outer surfaces of the portion of the medical device can be coated with different materials. For example, a stent can have a polymer coating having an anti-thrombogenic agent on the inner surface which directly
10 contacts blood flow and a polymer coating having an anti-inflammatory agent on the outer surface which directly contacts blood vessel wall. The inner surface and the outer surface can be coated by the different methods. Also, there can be more than one coating on a surface. Furthermore, an entire surface of the medical device is not necessarily coated.

In the present invention, the coated structure or plate is ablated by a laser to
15 form openings. The openings along with the remaining parts of the structure or plate make up the geometric pattern structure of the medical device. The structure or plate can be moved while the laser is held stationary to ablate the structure or plate into pattern, or alternatively, the laser can be programmed to move along a predetermined pattern by a method known to artisans. A combination of both, *i.e.* moving both the laser and the
20 structure or plate, is also possible. In the present invention, even a coated stent having a complex stent pattern can be made with high precision. A medical devices having multiple coating layers and a complicated geometry pattern can also be easily manufactured by the method of the present invention without flaws such as polymer-bridges at gaps or corners. Also, the layer thickness can be easily controlled by the method of the present invention.

In the case where a plate is coated and ablated, the plate is formed into a
25 portion of the medical device in the way known to artisans. In case the coated portion is a tube-like portion, it is formed by forming the flat plate into a tube-like shape and attaching the opposing edges of the plate together such as by fusing the two opposing sides. A method of fusing appropriate to a stent material can be chosen. Methods of fusing include
30 fusing by heat or using adhesive.

After the ablation of the present invention, there is no need to polish the ablated medical device to avoid rough cut surface because of the high quality of the cut surface.

Furthermore, a plurality of medical devices can be manufactured by coating
35 one large structure and, as ablating it as explained above, cutting the structure into individual coated portions. For example, if the coated portion is a tube-like portion, a long

tubular structure is coated first, and then ablated, and then cut into individual tube-like portions of medical devices. Likewise, a large plate can be coated first, cut into a smaller plate, and then formed into an individual coated structure and ablated. Alternatively, a large coated plate can be shaped into a large coated structure, and then it is cut into individual coated structures as ablated. In this way, a plurality of medical devices be made by using one coating step. Also, all of the medical devices will have uniform coating thicknesses.

If necessary, the thickness of the coating can be easily measured before the ablation step. For example, it is very useful to know an amount of a biologically active material contained in a medical material. This amount can be calculated in the present invention by measuring the thickness of the coating after the coating is placed on the medical device. For example, based on the concentration of biologically active material in the coating composition, the thickness of the coating, the amount of biologically active material placed on the device can be determined.

The description contained herein is for purposes of illustration and not for purposes of limitation. Changes and modifications may be made to the embodiments of the description and still be within the scope of the invention. Furthermore, obvious changes, modifications or variations will occur to those skilled in the art. Also, all references cited above are incorporated herein, in their entirety, for all purposes related to this disclosure.

THE CLAIMS

We claim:

1. A method for manufacturing a medical device having a coated portion having at least one opening therein, wherein the method comprises a process for manufacturing the coated portion, and the process comprises the steps of:
 - (a) obtaining a structure having an inner surface and an outer surface;
 - (b) coating at least a portion of the inner or outer surface with a first coating material to form a coated structure; and
 - (c) ablating through the coated structure with an ultrashort-pulse laser to form at least one opening therein.
2. The method of claim 1, wherein the structure is a tube-like structure.
3. The method of claim 1, wherein the medical device is a stent.
4. The method of claim 1, wherein step (b) comprises only coating the inner surface of the structure with the first coating material.
5. The method of claim 1, wherein step (b) comprises only coating the outer surface of the structure with the first coating material.
6. The method of claim 1, wherein step (b) comprises:
 - (i) coating the inner surface of the structure with the first coating material and
 - (ii) coating the outer surface of the structure with a second coating material.
7. The method of claim 6, wherein the first coating material and the second coating material are the same.

8. The method of claim 1, wherein the first coating material is a coating composition and the surface is coated by dipping the surface into the coating composition.

9. The method of claim 1, wherein the first coating material is a coating composition and the surface is coated by spray-coating the coating composition onto the surface.

10. The method of claim 1, wherein the first coating material comprises a polymer and a biologically active material.

11. The method of claim 1, wherein the first coating material comprises a biologically active material, and the coating step (b) is conducted by immobilizing the first coating material onto at least of a portion of the surface.

12. The method of claim 1, wherein the coated structure is ablated to form a plurality of openings therein that define a plurality of struts.

13. The method of claim 1, which further comprises cutting the coated structure into sections to form more than one coated portion.

14. The method of claim 13, wherein the cutting step is conducted between the coating step and the ablating step.

15. A method for manufacturing a medical device having a coated portion having at least one opening therein, wherein the method comprises a process for manufacturing the coated portion, and the process comprises the steps of:

- (a) obtaining a plate having a first surface and a second surface;
- (b) coating at least a portion of the first surface or second surface with a first coating material;
- (c) ablating through the coated plate with an ultrashort-pulse laser to form at least one opening therein; and
- (d) forming the coated portion with the ablated plate.

16. The method of claim 15, wherein the coated portion is a tube-like portion.
17. The method of claim 15, wherein the medical device is a stent.
18. The method of claim 15, wherein step (b) comprises only coating the first surface of the plate with the first coating material.
19. The method of claim 15, wherein step (b) comprises only coating the second surface of the plate with the first coating material.
20. The method of claim 15, wherein step (b) comprises:
 - (i) coating the first surface of the plate with the first coating material and
 - (ii) coating the second surface of the plate with a second coating material.
21. The method of claim 15, wherein the first coating material and the second coating material are the same.
22. The method of claim 15, wherein the first coating material is a coating composition and the surface is coated by dipping the surface into the coating composition.
23. The method of claim 15, wherein the first coating material is a coating composition and the surface is coated by spray-coating the coating composition onto the surface.
24. The method of claim 15, wherein the first coating material comprises a biologically active material, and coating is conducted by immobilizing the first coating material onto at least of a portion of the surface.
25. The method of claim 15, wherein the first coating material comprises a polymer and a biologically active material.

26. The method of claim 15, wherein the coated plate is ablated to form a plurality of openings therein that define a plurality of struts.
27. The method of claim 15, which further comprises cutting the coated plate into sections to form more than one coated tube-like portion.
28. The method of claim 27, wherein the cutting step is conducted between the coating step and the ablating step.
29. The method of claim 27, wherein the coated plate is cut as it is ablated.
30. A medical device having at least a tube-like portion which is insertable or implantable into the body of a patient, wherein the portion has a first surface and a second surface which are adapted for exposure to body tissue of the patient, wherein at least a part of the first surface is covered with a coating for release of a first biologically active material, wherein the second surface is substantially free of the first biologically active material, and wherein the medical device is manufactured by the method of claim 1.
31. The device of claim 30, wherein the first surface is the outer surface of the tube-like portion and the second surface is the inner surface of the tube-like portion.
32. The device of claim 30, wherein the medical device is a stent.
33. The device of claim 30, wherein at least a part of the second surface is covered with a second coating.
34. The device of claim 33, wherein the second coating comprises a second biologically active material.
35. The medical device of claim 30, wherein the second surface is substantially free of a coating.

36. A method for manufacturing a medical device having a coated portion having at least one opening therein, wherein the method comprises a process for manufacturing the coated portion, and the process comprises the steps of:

- (a) obtaining a structure having an inner surface and an outer surface;
- (b) coating at least a portion of the inner or outer surface with a first coating material;
and
- (c) ablating through the coated structure with a laser to form at least one opening therein.

37. A method for manufacturing a medical device having a coated portion having at least one opening therein, wherein the method comprises a process for manufacturing the coated portion, and the process comprises the steps of:

- (a) obtaining a plate having a first surface and a second surface;
- (b) coating at least a portion of the first surface or second surface with a first coating material;
- (c) ablating through the coated plate with a laser to form at least one opening therein;
and
- (d) forming the coated portion with the ablated plate.

38. A medical device made by the method of claim 1.

39. The medical device of claim 38 which is a stent.

40. A medical device made by the method of claim 15.

41. The medical device of claim 40, wherein the structure is a tube-like structure.

42. The medical device of claim 40 which is a stent.

1/2

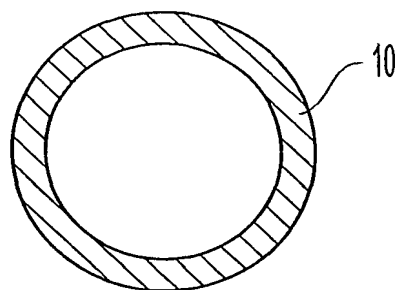


Fig. 1A

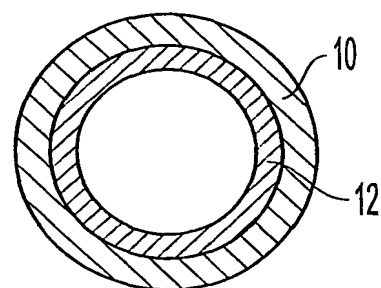


Fig. 1B

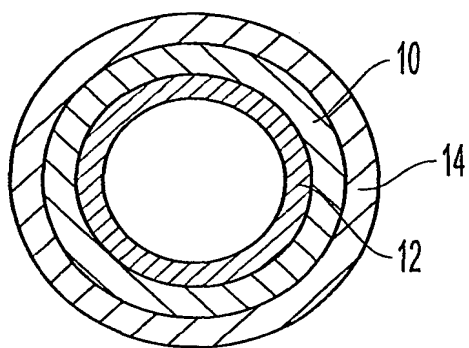


Fig. 1C

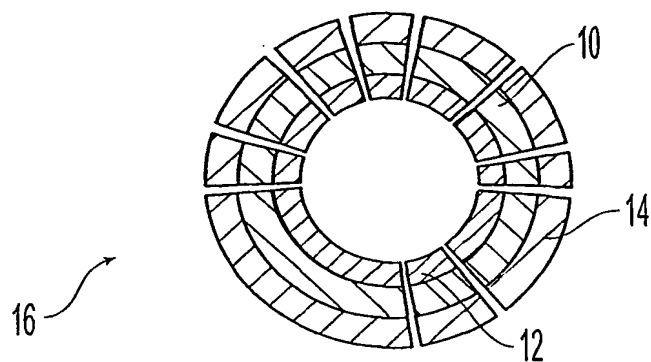


Fig. 1D

2/2




Fig. 2A

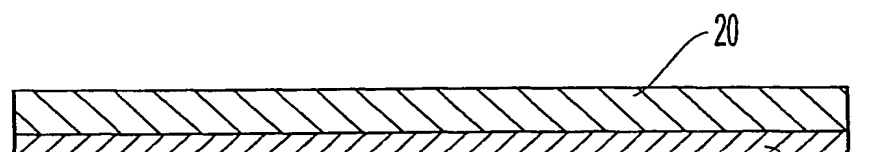


Fig. 2B

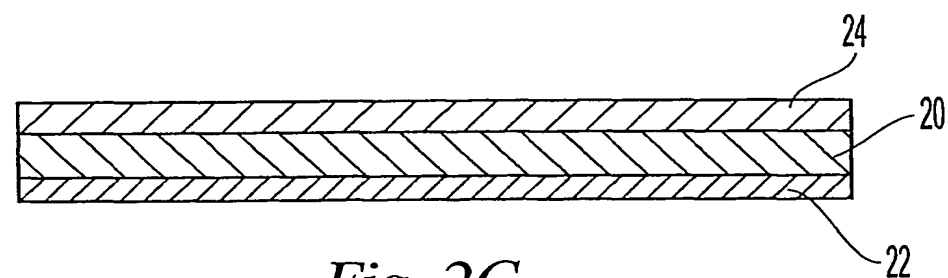


Fig. 2C

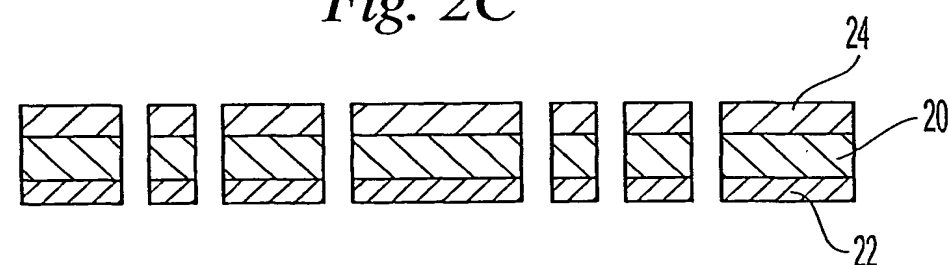


Fig. 2D

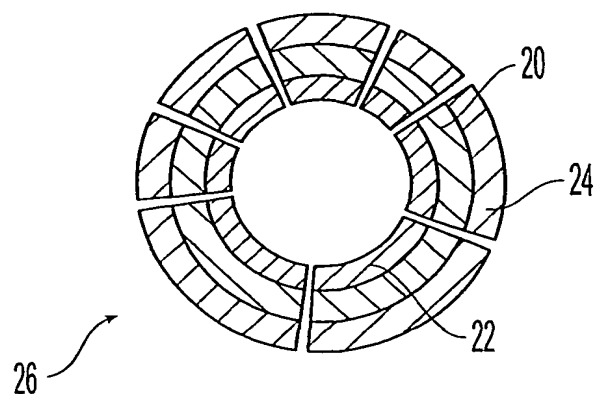


Fig. 2E

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 June 2002 (06.06.2002)


PCT

(10) International Publication Number
WO 02/043619 A3

- (51) International Patent Classification⁷: A61F 2/06, B23K 26/38 (72) Inventor: WEBER, Jan; Birmingham Road, Tuam (IE).
- (21) International Application Number: PCT/US01/44301 (74) Agents: STERN, Gidon, D. et al.; Pennie & Edmonds LLP, 1155 Avenue of the Americas, New York, NY 10036 (US).
- (22) International Filing Date: 27 November 2001 (27.11.2001) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
- (26) Publication Language: English
- (30) Priority Data: 09/724,503 28 November 2000 (28.11.2000) US
- (71) Applicant: SCIMED LIFE SYSTEMS, INC. [US/US]; One SciMed Place, Maple Grove, MN 55311-1566 (US).

[Continued on next page]

(54) Title: METHOD FOR MANUFACTURING A MEDICAL DEVICE HAVING A COATED PORTION BY LASER ABLATION

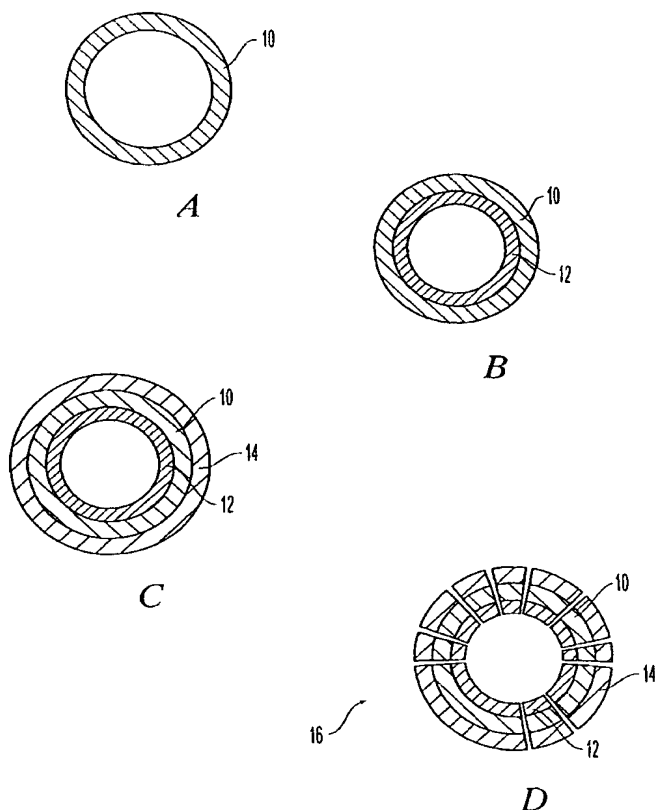

(57) Abstract: The present invention is directed to a method for manufacturing a medical device having a coated portion which comprises obtaining a structure having an inner surface and an outer surface; coating at least a portion of the inner or outer surface with a first coating material; and ablating the coated tubular structure with ultrashort laser pulses to form at least one opening therein to form the coated portion. A plate can be used instead of the structure, and the plate is folded to form the structure after the ablation. A plurality of medical devices, e.g. stents, made of any materials and having uniform coating(s), can be easily manufactured by the method of the present invention.

WO 02/043619 A3



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

(88) Date of publication of the international search report:
13 February 2003

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/44301

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F2/06 B23K26/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F B23K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 54704 A (ADVANCED CARDIOVASCULAR SYSTEM) 21 September 2000 (2000-09-21)	36
Y	page 3, line 19 - line 25	1-14, 30-35, 38,39
	page 9, line 24 -page 10, line 3	
Y	EP 0 842 729 A (UNIV CALIFORNIA ;APPLIED VASCULAR ENG INC (US)) 20 May 1998 (1998-05-20) column 1, line 1-49 column 3, line 42 - line 53 column 5, line 46 - line 47 figures 1A,1B	1-35, 38-42

-/--



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

27 June 2002

Date of mailing of the international search report

22/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Buchmann, G

INTERNATIONAL SEARCH REPORT

Intern ☐ International Application No

PCT/US 01/44301

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 689 807 A (ADVANCED CARDIOVASCULAR SYSTEM) 3 January 1996 (1996-01-03)	37
Y	column 2, line 46 - column 3, line 24 column 4, line 7 - line 24 column 8, line 36 - line 48 -----	4, 6, 10, 15-29, 35, 40-42
Y	US 5 356 433 A (ROWLAND STEPHEN M ET AL) 18 October 1994 (1994-10-18) cited in the application column 4, line 20 - line 47 -----	11
A	DE 197 45 294 A (BIOTRONIK MESS & THERAPIEG) 15 April 1999 (1999-04-15) the whole document -----	
A	EP 0 951 877 A (CORDIS CORP) 27 October 1999 (1999-10-27) the whole document -----	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT
Information on patent family members

Intern. Application No

PCT/US 01/44301

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0054704	A	21-09-2000	AU 3762100 A WO 0054704 A1	04-10-2000 21-09-2000
EP 0842729	A	20-05-1998	EP 0842729 A1	20-05-1998
EP 0689807	A	03-01-1996	US 5629077 A CA 2152647 A1 EP 0689807 A2 JP 8024346 A US 5766710 A	13-05-1997 28-12-1995 03-01-1996 30-01-1996 16-06-1998
US 5356433	A	18-10-1994	NONE	
DE 19745294	A	15-04-1999	DE 19745294 A1 EP 0909553 A1 US 6160240 A	15-04-1999 21-04-1999 12-12-2000
EP 0951877	A	27-10-1999	US 6264687 B1 AU 746217 B2 AU 2384899 A EP 0951877 A2 JP 11332998 A US 2001025130 A1	24-07-2001 18-04-2002 28-10-1999 27-10-1999 07-12-1999 27-09-2001

THIS PAGE BLANK (USPTO)